





# ASSEMBLY INSTRUCTION

## etherCON® | NE8MX & NE8MX-B


### Ruggedized RJ45 Data Cable Connector Carrier

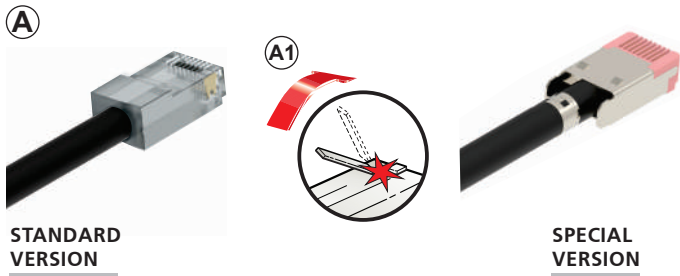

- Ⓐ Special version remove the cover.
- Ⓐ1 Cut off the release tab of RJ45 plug.

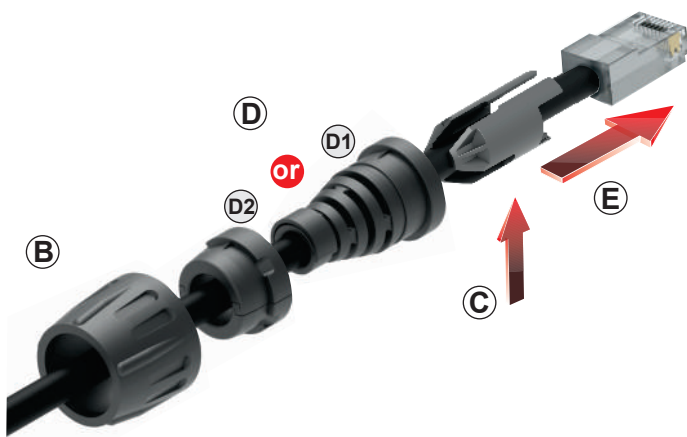

- Ⓑ Slide the bushing over the connector onto the cable.
- Ⓒ Put the chuck onto the cable. Align the opening with the contact side.
- Ⓓ Put the suitable boot on the cable:
  - D1: for cable O.D. 4.5 [0.18"] to 5 mm [0.2"]
  - D2: for cable O.D. 5.0 [0.2"] to 8 mm [0.3"]

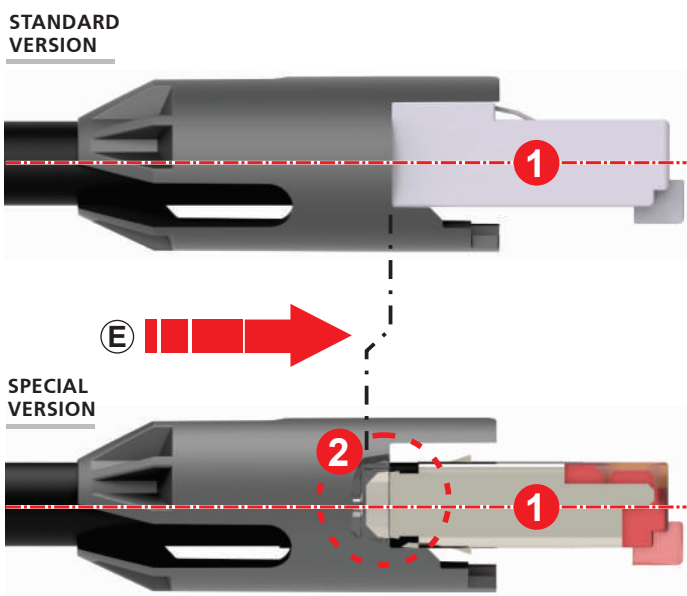


- Ⓔ Position the RJ45 in the chuck.

#### Attention:

- 1 RJ45 must be straight.
- 2 Special versions must engage in the inner recess of the chuck.



**F** Position the bushing onto the chuck.

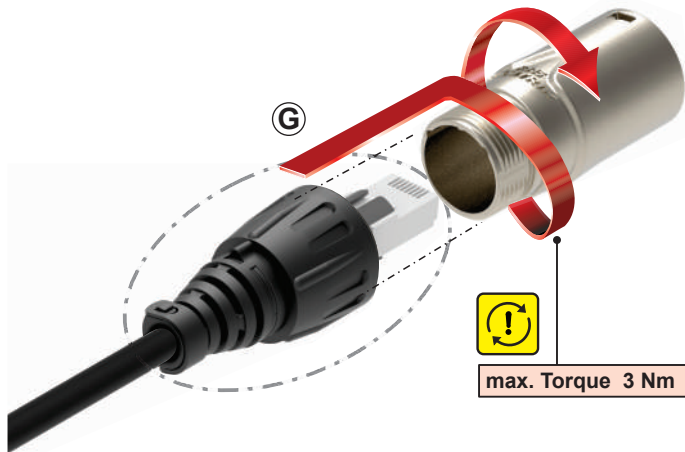

**G** Slide the unit (insert and boot) into the housing and tighten the bushing with **max. torque 3 Nm (2.2 lb-ft).**



**H** CAUTION:

**There is no overlap allowed.**



**I** Close the seal of the boot.

**FINISHED etherCON® NE8MX:**

Find more etherCON® details on [www.neutrik.com](http://www.neutrik.com).



NEUTRIK AG	LI	T: +423/237 24 24	F: +423/232 53 93
NEUTRIK USA Inc.	USA	T: +1 704 / 972 3050	F: +1 704/438 9202
NEUTRIK (UK) Ltd.	UK	T: +44 1983 / 811 441	F: +44 1983/811 439
NEUTRIK Vertriebs GmbH	DE/NL/AT/DK	T: +49 8131 / 280 890	F: +49 8131/280 830

NEUTRIK France	FR	T: +33 1/4131 6750	F: +33 1/4131 0511
NEUTRIK Tokyo Ltd.	JP	T: +81 3/3663 4733	F: +81 3/3663 4796
NEUTRIK Hong Kong Ltd.	HK	T: +852/2687 6055	F: +852/2687 6052
NEUTRIK India Pvt. Ltd.	IND	T: +91/982 05 43 424	F: +91/22 26163 540

Draft. Nr.: BDA 563-V2 | Update: 22.05.2019 | Data subject to change without prior notice. ©2019 NEUTRIK®. ALL RIGHTS RESERVED. NEUTRIK® & etherCON® are registered trademark.