

Visual Fault Locators

Optical Fiber Damage/Break Locator



FFL-100
(Ruggedized)

FFL-050
(Pocket-sized)

KEY FEATURES

- Compact, ergonomic design for ultimate portability
- Visible wavelength is 650 nm
- High powered laser (1 mW) for single-mode (> 7 km) and multi-mode (> 5 km) connectors
- CONTINUOUS or FLASH illumination
- Universal connector interface for quick & easy connection
- 2.5 mm connector input (1.25 mm adapter available)
- Includes soft-sided carrying case with belt loop


Whether installing or troubleshooting, the Visual Fault Locator (VFL) is an essential tool that quickly and easily locates problem areas in fiber cables. By pinpointing the exact location of fiber damage, technicians can diagnose, troubleshoot, and fix the problem efficiently. The VFL is also used for conducting continuity tests and performing fiber identification.

JDSU offers two unique versions of the VFL that are economically priced and ergonomically designed for comfortable handling and portability. Both versions are equipped with a 2.5 mm interface and are compatible with connectors such as SC, ST, and FC, while the 1.25 mm adapter enables connection to LC and MU connectors. The VFL emits a bright red laser beam (Class II), making the light escaping from the damaged fiber easily visible from a distance. The Continuous/ Flash control button lets operators choose between continuous or flashing illumination.

APPLICATIONS

- Locate sharp bends, breaks, and damages in fiber
- Conduct end-to-end continuity tests
- Perform fiber tracing and identification

FIBER TROUBLESHOOTING & VERIFICATION

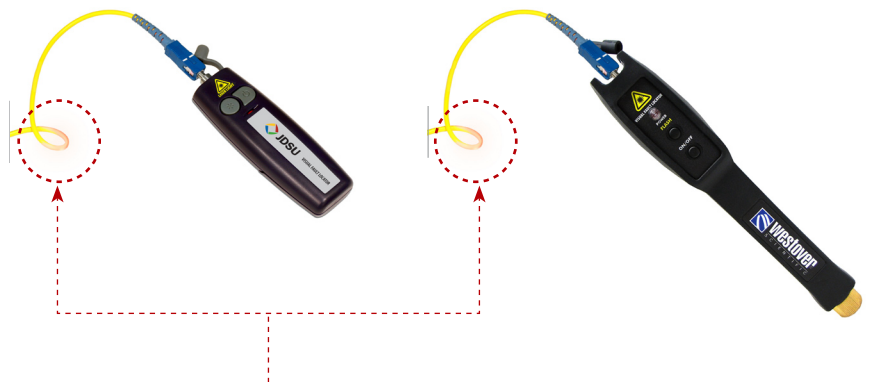

Red illumination indicating fiber damage/bend

BENEFITS

- Easy-to-use
- Quickly & easily locate damage in optical fiber with CONTINUOUS and FLASHING illumination
- Economically priced
- Ruggedized and designed for demanding field use
- Long-lasting battery life
- Protective rubber end cap

ORDERING INFORMATION


| | |
|--------------------|--|
| FFL-100 | Visual fault locator (ruggedized) with 1.25 mm adapter |
| FFL-050 | Visual fault locator (pocket-sized) |
| FFL-U12 | Universal 1.25 mm adapter for FFL-100 |
| FFL-050-U12 | Universal 1.25 mm adapter for FFL-050 |

COMPARISON
FFL-050 (Pocket-sized)

- Compact size for portability
- Uses two AAA batteries (included) with 30+ hours continuous power
- Universal 1.25mm adapter sold separately

FFL-100 (Ruggedized)

- Rugged, shock-absorbing construction
- Uses two AA batteries (included) with 80+ hours continuous power
- Professional-grade with universal 1.25mm adapter included



Universal 1.25 mm adapter for FFL-100

SPECIFICATIONS

| | FFL-050 (Pocket-sized) | FFL-100 (Ruggedized) |
|----------------------------|--|---|
| Dimensions | 11.4 x 3.5 x 2.0 cm (4.5 x 1.4 x 0.8 in) | 22.0 x 3.5 x 3.0 cm (8.7 x 1.4 x 1.2 in) |
| Weight | 46 g (1.6 oz) with two AAA batteries | 150 g (5.3 oz) with two AA batteries |
| Fiber Compatibility | Single-mode, Multimode | Single-mode, Multimode |
| Wavelength | 650 nm (visible) | 650 nm (visible) |
| Laser Safety Rating | Class II | Class II |
| Output Power | 1.0 mW max | 1.0 mW max |
| Output Modes | CONTINUOUS and FLASHING | CONTINUOUS and FLASHING |
| Range | > 7 km single-mode > 5 km multimode | > 7.5 km single-mode > 5 km multimode |
| Connector Interface | Universal 2.5 mm (fixed) Universal 1.25 mm adapter (sold separately) | Universal 2.5 mm (fixed) Universal 1.25 mm adapter (included) |
| Controls | ON/OFF Continuous/Flashing | ON/OFF Continuous/Flashing |
| Battery Type | Two AAA | Two AA |
| Battery Life | 30+ hours on continuous | 80+ hours on continuous |
| Carrying Case | Soft-sided with belt loop | Soft-sided with belt loop |
| Safety | 1992, EN 61010-2, CE | 1992, EN 61010-2, CE |
| Warranty | 1 year | 1 year |

Distributed and supported in Australia by AFC Group Pty Ltd.

| | |
|--|--|
| Sales Office VIC, ACT, SA, NT, TAS 03 9737 4250 | Sales Office WA 08 6253 2200 |
| Sales Office NSW 02 9421 4200 | Sales Office QLD 07 3292 1400 |
| www.afcgroup.com.au | sales@afcgroup.com.au |

All statements, technical information and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its applications. JDSU reserves the right to change at any time without notice the design, specifications, function, fit or form of its products described herein, including withdrawal at any time of a product offered for sale herein. JDSU makes no representations that the products herein are free from any intellectual property claims of others. Please contact JDSU for more information. JDSU and the JDSU logo are trademarks of JDS Uniphase Corporation. Other trademarks are the property of their respective holders. © 2008 JDS Uniphase Corporation. All rights reserved. 30162537 001 1208 VFL.DS.FIT.TM.AE

Test & Measurement Regional Sales

| | | | | |
|---|--|---|---|--|
| NORTH AMERICA TOLL FREE: 1 866 228 3762 FAX: +1 301 353 9216 | LATIN AMERICA TEL: +1 954 688 5660 FAX: +1 954 345 4668 | ASIA PACIFIC TEL: +852 2892 0990 FAX: +852 2892 0770 | EMEA TEL: +49 7121 86 2222 FAX: +49 7121 86 1222 | www.jdsu.com/inspect |
|---|--|---|---|--|